





Arm Type Air Tapping Unit

WORK RANGE 1600X500m/m
RMAX. X MIN.

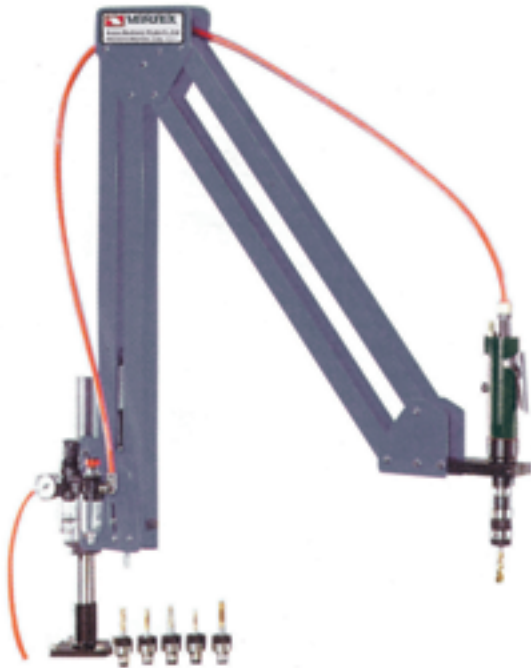


VAT-1608/1612/1616 VAT-1908/1912/1916

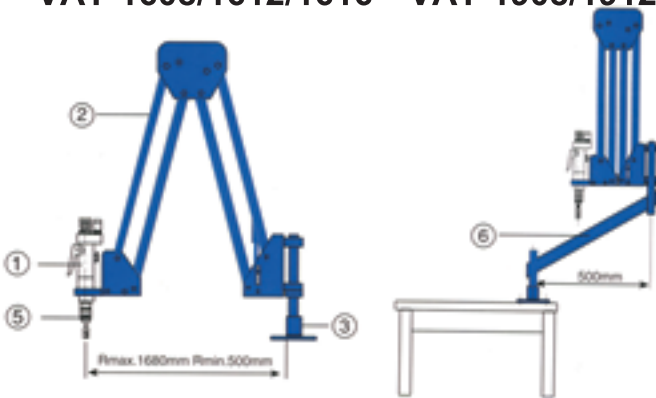

To solve all tapping problems

1. Rapid positioning and high machining speed increase productivity.
2. Lower tap damage rate, high thread accuracy.
3. Tap shall never break for tapping through-hole or blind-hole.
4. Tapping for heavier workpiece requires no positioning equipments nor movement, large work area.
5. Lower machining cost than that by CNC machine, drilling machine or manual tapping operation.
6. Drilling to max: 6mm diameter
7. Easy operation, no experience or strength required.

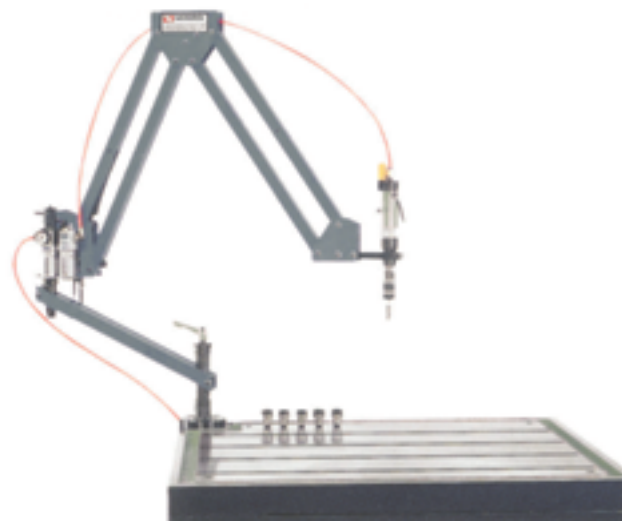

WORK RANGE 1900X200m/m
RMAX. X MIN.

ORDER NO.	VAT-1608	VAT-1612	VAT-1616
For Tap	M2~M8	M3~M12	M3~M16
	TC-312	TC-312	TC-312
Speed (rpm)	700	400	400
Weight (kgs)	18	18	20
Work Range	Rmax 1600mm		
	Rmin 500mm		
Code No.	3404-420	3404-421	3404-422

ORDER NO.	VAT-1908	VAT-1912	VAT-1916
For Tap	M2~M8	M3~M12	M3~M16
	TC-312	TC-312	TC-312
Speed (rpm)	700	400	400
Weight (kgs)	20	18	22
Work Range	Rmax 1900mm		
	Rmin 200mm		
Code No.	3404-425	3404-426	3404-427

VAT-1608, 1612, 1616 STANDARD ACCESSORIES

1. Air tapping spindle
2. Parallel arm
3. Table mounting column
4. Air unit
5. Choose any six safety clutch tapping adapters

VAT-1908, 1912, 1916 STANDARD ACCESSORIES

1. Air tapping spindle
2. Parallel arm
3. Table mounting column
4. Air unit
5. Choose any six safety clutch tapping adapters
6. Radial jib, increases arm reach by 500mm